



Burris

FIND WHAT MATTERS



2024 | PRODUCT CATALOG

TABLE OF CONTENTS

BURRISCONNECT	3
HUNTING	
ELIMINATOR® LASERSCOPES®	6
VERACITY™PH RIFLESCOPES	8
VERACITY™ RIFLESCOPES	10
SIGNATURE HD™ RIFLESCOPES	12
FULLFIELD IV™ RIFLESCOPES	14
FULLFIELD E1™ RIFLESCOPES	16
DROPTINE™ RIFLESCOPES	18
SCOUT™ SCOPES	20
HANEGUN SCOPES	21
OBSERVATION	
SIGNATURE™ LRF 2000	24
SIGNATURE™ LRF 10X42	25
SIGNATURE™ HD BINOCULARS	26
DROPTINE™ HD BINOCULARS	27
SIGNATURE™ HD SPOTTING SCOPE	28
ARCHERY	
ORACLE™ 2 BOWSIGHT	32
ORACLE™ X CROSS BOWSIGHT	33
THERMAL	
BTS35 V3	36
BTC35 V3	37
BTH35 V3	38
TACTICAL	
XTR PRO™ RIFLESCOPES	42
XTR III™ RIFLESCOPES	44
RT™ PRISM RIFLESCOPES	46
RT™ TACTICAL KIT	48
RT™ RIFLESCOPES	50
FASTFIRE™ C RED DOT SIGHT	52
FASTFIRE™ RED DOT SIGHTS	54
RINGS & MOUNTS	
FASTFIRE™ MOUNTS	58
AR P.E.P.R. /SIGNATURE QD™ MOUNTS	60
XTR™ MOUNTS	61
SIGNATURE™ MOUNTS	62
BASES	64

2024 NEW PRODUCTS

NEW ELIMINATOR 6

Page 4

The Eliminator® 6 revolutionizes hunting riflescope technology that combines outstanding optics, pinpoint laser ranging, and precision trajectory compensation. It eliminates guesswork, maximizes accuracy, and enables hunters to make precise and ethical shots, ensuring they return home with success.



NEW VERACITY PH

Page 6

Years of development and pushing the limits of what is possible in a rifle optic have led up to this moment. We introduce the Veracity PH from Burris - the perfect combination of reliability, quality, and technology. It delivers the fastest and most precise aiming solution in a hunting optic ever. Dial to distance with confidence and let Burris do the math.

The Veracity PH takes speed and precision to the highest level with the new Burris PÉK (Programmable Elevation Knob) System.



NEW FASTFIRE C

Page 15

This versatile red dot reflex sight provides the perfect fast-action sighting solution for your concealed carry and slim handguns. The integrated control circuit adjusts the brightness of the aiming dot according to surrounding light levels. When holstered or stored, the optic switches to an ultra-low brightness setting, saving the battery for when you need it. Bringing your firearm up to ready instantly brings the dot back to the optimal level.






BURRISCONNECT

MOBILE APP

A ballistics powerhouse at your fingertips, the BurrisConnect app serves as the solution for operating the Veracity PH, live media sharing on Burris Thermal, and the go-to ballistics tool for every shooter. BurrisConnect offers users the latest in bullet data to build DOPE cards, reticle maps, Eliminator data tables, and custom rifle profiles. From seasoned long-range competition enthusiasts to those just getting their first rifle zeroed. The ever-evolving BurrisConnect app gives you everything you need to get dialed in.

Control and program the products such as the Veracity PH, Eliminator 6, and Thermal Optics.

- Store Rifle profiles and ballistic data
- Adjust connected thermal device settings in real time via WI-FI
- Record video and capture images remotely with your thermal device.
- Build custom DOPE cards
- Reticle mapping for all Burris riflescopes
- Build Eliminator data tables

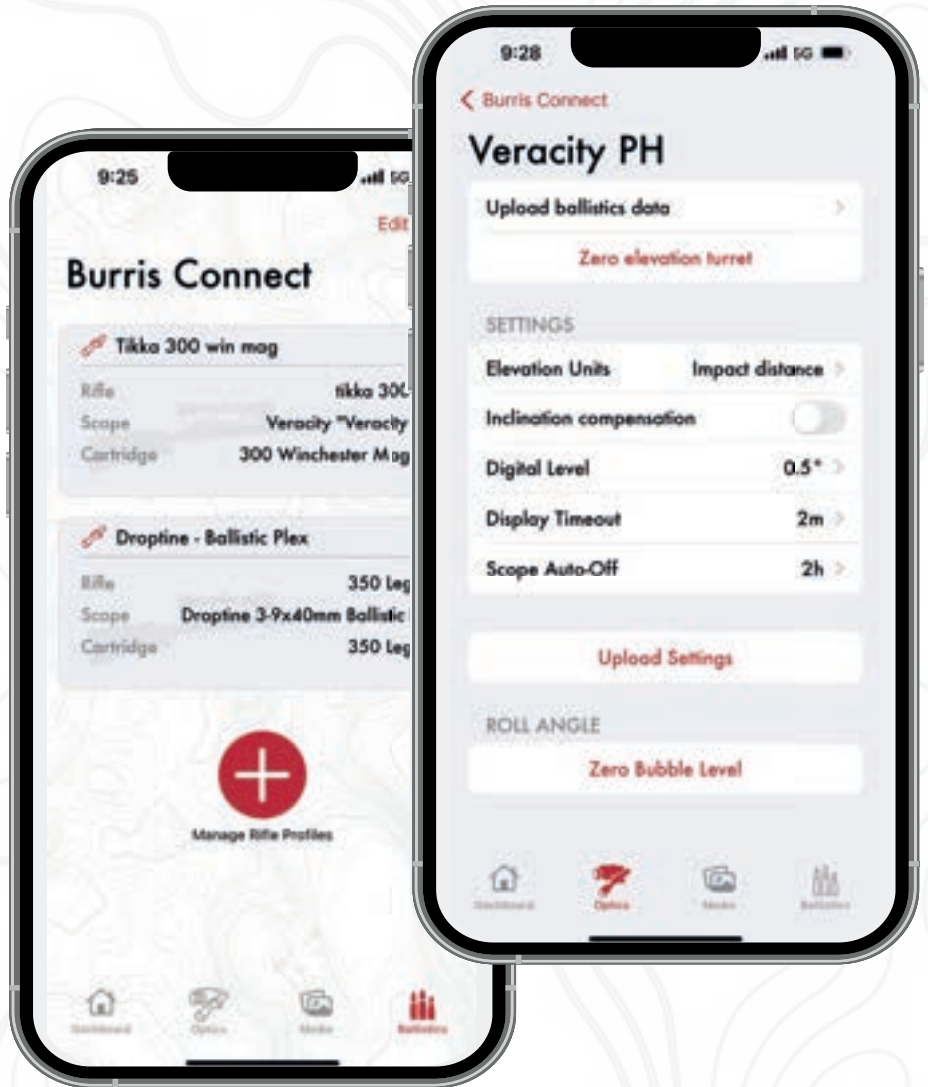

SCAN HERE FOR
BURRISCONNECT
FREE DOWNLOAD





HUNTING







ELIMINATOR™ 6

RIFLESCOPES



Driven by an elite hunter mindset, the guiding principles of 'Train Far. Hunt Responsibly. Don't Miss.' drove Burris engineers to integrate the most advanced ranging, environmental monitoring, optical performance, and ballistics technology into a single, unified platform.

The Eliminator 6 gives hunters the utmost confidence in their ability to make the right shot under the toughest conditions, with an entirely fresh, more streamlined appearance. When using the Eliminator 6, simply range your target, hold the illuminated aiming point on your target, and pull the trigger.

ELIMINATOR RIFLESCOPE SERIES

ELIMINATOR 6 4-20X56MM

ITEM # 200177 | RETICLE X177 | MSRP \$3,000.00



- 2,000 YARD RANGEFINDER
- HEADS UP DISPLAY WITH 11 DATA ZONES
- ENVIRONMENTAL MONITORING
- BALLISTIC COMPENSATION
- PRECISE AIMING SOLUTIONS
- COMPREHENSIVE USER INTERFACE
- SHOT CALL MARKER
- X177 RETICLE
- BLUETOOTH FOR BURRISCONNECT
- ED LOW-DISPERSION GLASS

ELIMINATOR 6 4-20X52MM



ELIMINATOR 5 5-20X50MM

ITEM # 200155 | RETICLE X195 | MSRP \$2,364.00



SPECIFICATIONS

ELIMINATOR RIFLESCOPIES		4-20x52	5-20x50
ITEM NUMBER		200177	200155
MAGNIFICATION		4-20x	5-20x
OBJECTIVE LENS DIAMETER		52 mm	50 mm
OBJECTIVE TUBE DIAMETER		60.1 mm	55 mm
TUBE DIAMETER		34 mm	Mounting Clamps
OCULAR END DIAMETER		44.28 mm	42 mm
LASER RANGE		2,000 yd	2,000 yd
FIELD OF VIEW (feet @ 100 yards)	Low High	30.5 ft 6.5 ft	22 ft 5.8 ft
EYE RELIEF		3.4 in.	3.5 in.
EXIT PUPILS	Low High	8.6 mm 2.9 mm	10 mm 2.5 mm
DIOPTR SETTING		+2 to -3	+2 to -3
RETICLE PLANE		REAR	REAR
RETICLE		X177	X96
TOTAL RETICLE CORRECTION		35 MOA	32 MOA
RETICLE ILLUMINATION		Push Button/Auto 9 Levels	Push Button/Auto 5 Levels
BATTERY		CR 123A x1	AAA x2
LENGTH		14.6 in.	15.5 in.
WEIGHT		30 oz	28.8 oz
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE		40 MOA	50 MOA
ELEVATION/WINDAGE TURRET GRADUATIONS (Clicks)		1/8 MOA	1/8 MOA
REMOTE		Bluetooth	Bluetooth
REMOTE BATTERY		CR2032 x1	CR2032 x1
PARALLAX/FOCUS RANGE		25 yd to Infinity	30 yd to Infinity
OPERATING TEMPERATURE		-4 °F to +110 °F	-4 °F to +110 °F





★ ★ ★ ★ ★
FOREVER WARRANTY
★ NO QUESTIONS ASKED ★



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



BLUETOOTH

NEW VERACITY PH RIFLESCOPE SERIES



VERACITY PH 2.5-12x42

MSRP \$1,320.00 | 3PW-MOA | ITEM # 200201



VERACITY PH 3-15x44

MSRP \$1,440.00 | RC-MOA | ITEM # 200202



VERACITY PH 4-20x50

MSRP \$1,560.00 | RC-MOA | ITEM # 200203



SPECIFICATIONS

VERACITY PH RIFLESCOPES		2.5-12x42	3-15x44	4-20x50
ITEM NUMBER		200201	200202	200203
MAGNIFICATION		2.5-12x	3-15x	4-20x
OBJECTIVE LENS DIAMETER		42 mm	44 mm	50 mm
OBJECTIVE TUBE DIAMETER		49.53 mm	50.8 mm	57.91 mm
TUBE DIAMETER		30 mm	30 mm	30mm
OCULAR END DIAMETER		44.19 mm	44.19 mm	44.19 mm
FIELD OF VIEW (feet @ 100 yards)	Low	43.0 ft	36.0 ft	26.0 ft
	High	9.0 ft	7.5 ft	5.5 ft
EYE RELIEF	Low	95.0 mm	92.7 mm	90.0 mm
	High	93.3 mm	92.0 mm	92.3 mm
EXIT PUPILS	Low	11.2 mm	11.0 mm	10.8 mm
	High	3.5 mm	2.9 mm	2.5 mm
DIOPTER SETTING		+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE		Front	Front	Front
RETICLE		3PW-MOA	RC-MOA	RC-MOA
RETICLE ILLUMINATION		Rotary Dial, 4 Levels	Rotary Dial, 4 Levels	Rotary Dial, 4 Levels
BATTERY		CR 2450 x2	CR 2450 x2	CR 2450 x2
LENGTH		12.5 in.	13 in.	15 in.
WEIGHT		28.1 oz	27.3 oz	29.1 oz
ELEVATION TURRET MARKING GRADUATIONS		¼ MOA	¼ MOA	¼ MOA
ELEVATION TURRET DIGITAL RESOLUTION		1/10 MOA	1/10 MOA	1/10 MOA
TOTAL ELEVATION ADJUSTMENT RANGE*		120 MOA	100 MOA	80 MOA
ELEVATION TURRET TRAVEL LIMIT**		33.8 MOA	33.8 MOA	33.8 MOA
WINDAGE TURRET GRADUATIONS		¼ MOA	¼ MOA	¼ MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		70 MOA	60 MOA	45 MOA
WINDAGE TURRET TRAVEL LIMIT**		24 MOA	24 MOA	24 MOA
PARALLAX FOCUS		Side Focus	Side Focus	Side Focus
PARALLAX/FOCUS RANGE		25 yd to Infinity	25 yd to Infinity	25 yd to Infinity

* Example: 50-MOA total adjustment range equates to roughly 25 MOA in either direction from center.

** Rotation-limited dial: this is the amount of available travel after zeroing the turret.

The **VERACITY PH** features a built-in heads-up display and provides customizable ballistic data, including dialed elevation distance in yards, meters, or MOA, as well as rifle cant, range-compensated wind value, and optic battery level in real time.



3PW-MOA RETICLE



RC-MOA RETICLE





VERACITY™ RIFLESCOPES

The Burris Veracity is our top-of-the-line hunting scope featuring a 5x zoom system and a larger field of view with a front focal plane design. The front focal plane reticle allows for the reticle size to increase or decrease with magnification, ensuring trajectory compensation is always correct for the selected power setting.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



FOREVER WARRANTY
NO QUESTIONS ASKED

VERACITY RIFLESCOPE SERIES

VERACITY 2-10x42

MSRP \$804.00 | BALLISTIC PLEX E1™ | ITEM # 200621

VERACITY 3-15x50

MSRP \$984.00 | BALLISTIC PLEX E1™ | ITEM # 200636

VERACITY 4-20x50

MSRP \$1044.00 | BALLISTIC PLEX E1™ | ITEM # 200640

MSRP \$1032.00 | PLEX E1™ Varmint | ITEM # 200641

VERACITY 5-25x50

MSRP \$1176.00 | PLEX E1™ Varmint | ITEM # 200650

MSRP \$1176.00 | BALLISTIC PLEX E1™ | ITEM # 200651




VERACITY SERIES FEATURES


- PROGRESSIVELY THICK CROSSHAIRS
- 5-TIMES ZOOM SYSTEM
- ADVANCED WINDAGE AND ELEVATION ADJUSTMENTS
- FRONT FOCAL PLANE RETICLES
- ZERO CLICK STOP
- ERGONOMIC DESIGN

SPECIFICATIONS

VERACITY RIFLESCOPES		2-10x42	3-15x50	4-20x50	5-25x50
ITEM NUMBER		200621	200636	200640/641	200650/651
MAGNIFICATION		2-10x	3-15x	4-20x	5-25x
OBJECTIVE LENS DIAMETER		42 mm	50 mm	50 mm	50 mm
OBJECTIVE TUBE DIAMETER		49.28 mm	57.21 mm	57.21 mm	57.21 mm
TUBE DIAMETER		30 mm	30 mm	30 mm	30 mm
OCULAR END DIAMETER		44.19 mm	44.19 mm	44.19 mm	44.19 mm
FIELD OF VIEW (feet @ 100 yards)	Low High	52.0 ft 10.5 ft	36.0 ft 7.5 ft	26.0 ft 5.5 ft	21.0 ft 4.3 ft
EYE RELIEF	Low High	3.50 in. 4.25 in.	3.50 in. 4.25 in.	3.50 in. 4.25 in.	3.50 in. 4.25 in.
EXIT PUPILS	Low High	31.0 mm 4.2 mm	16.0 mm 3.3 mm	12.0 mm 2.5 mm	10.0 mm 2.0 mm
DIOPTRER SETTING		+2 to -3	+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE		Front	Front	Front	Front
RETICLE		Ballistic Plex E1 FFP	Ballistic Plex E1 FFP	Ballistic Plex E1 FFP Varmint Ballistic Plex E1 FFP	Ballistic Plex E1 FFP Varmint Ballistic Plex E1 FFP
KNOB STYLE*		MAD/LC/Z	MAD/LC/Z	TC/Z MAD/LC/Z	TC/Z MAD/LC/Z MAD/LC/Z/E
LENGTH		13.5 in.	14.1 in.	15 in.	16.4 in.
WEIGHT		22.7 oz	25.2 oz	27.2 oz	28.2 oz
TOTAL ELEVATION ADJUSTMENT RANGE*		70 MOA	70 MOA	70 MOA	64 MOA
TURRET GRADUATIONS (Clicks)		¼ MOA	¼ MOA	¼ MOA	¼ MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		40 MOA	40 MOA	40 MOA	30 MOA
PARALLAX/ FOCUS RANGE		50 yd to Infinity	50 yd to Infinity	50 yd to Infinity	50 yd to Infinity
OPERATING TEMPERATURE		-20 °F to +140 °F	-20 °F to +140 °F	-20 °F to +140 °F	-20 °F to +140 °F



Ballistic Plex E1™ FFP



Ballistic Plex E1™ FFP Varmint

* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.

*Knob Style Codes

MAD - M.A.D. System, single turn **LC** - Low, Capped Knob **LT** - Low, Single-Turn Tactical Knob **TC** - Tall, Capped Knob **TT** - Tall, Multi-Turn Tactical Knob **Z** - Zero Click Stop **E** - Extra Low, Capped Knob (included in box)





SIGNATURE™ HD RIFLESCOPES

Built on a legacy of reliability and confidence when it matters most, the new Burris Signature Series line of riflescopes offers shooters the Burris Signature experience with bright clear optics and rugged dependability. Available in three different magnification levels and various front and rear focal plane reticle options, the Signature Series brings high-end features to a platform serious hunters and shooters will enjoy.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

SIGNATURE HD RIFLESCOPE SERIES



SIGNATURE HD 2-10x40

MSRP \$480.00 | RETICLE BALLISTIC E3™ | ITEM#200530



SIGNATURE HD 3-15x44

MSRP \$672.00 | BALLISTIC PLEX E1™ | ITEM # 200531

MSRP \$624.00 | FINE PLEX™ | ITEM # 200532



SIGNATURE HD 5-25x50

MSRP \$876.00 | BALLISTIC E3™ IIIu. | ITEM # 200533


MSRP \$816.00 | FINE PLEX™ | ITEM # 200534

MSRP \$948.00 | 6.5 CM™ FFP | ITEM # 200535




SPECIFICATIONS


SIGNATURE HD RIFLESCOPES		2-10x40	3-15x44	3-15x44	5-25x50	5-25x50	5-25x50
ITEM NUMBER		200530	200531	200532	200533	200534	200535
MAGNIFICATION		2-10x	3-15x	3-15x	5-25x	5-25x	5-25x
OBJECTIVE LENS DIAMETER		40 mm	44 mm	44 mm	50 mm	50 mm	50 mm
OBJECTIVE END DIAMETER		49.2 mm	53.09 mm	53.09 mm	59.18 mm	59.18 mm	59.18 mm
OCULAR END DIAMETER		4.2 mm	44.96 mm	44.96 mm	44.96 mm	44.96 mm	44.96 mm
TUBE DIAMETER		1 in.	1 in.	1 in.	30 mm	30 mm	30 mm
FIELD OF VIEW (feet @ 100 yards)	Low High	54.0 ft 10.8 ft	37.5 ft 7.5 ft	37.5 ft 7.5 ft	22.5 ft 4.5 ft	22.5 ft 4.5 ft	22.5 ft 4.5 ft
EYE RELIEF	Low High	3.8 in. 3.5 in.	3.8 in. 3.5 in.	3.8 in. 3.5 in.	3.6 in. 3.3 in.	3.6 in. 3.3 in.	3.6 in. 3.3 in.
EXIT PUPILS	Low High	8 mm 3.5 mm	8 mm 3.3 mm	8 mm 3.3 mm	8 mm 2.2 mm	8 mm 2.2 mm	8 mm 2.2 mm
DIOPTER SETTING		+2 to -3	+2 to -3	+2 to -3	+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE		Rear	Rear	Rear	Rear	Rear	Front
RETICLE		Ballistic E3	Ballistic E3 Illuminated	Plex	Ballistic E3 Illuminated	Fine Plex	6.5 CM Illuminated
LENGTH		11.75 in.	13.13 in.	13.13 in.	14.3 in.	14.3 in.	14.3 in.
WEIGHT		17.6 oz	20.8 oz	20 oz	24 oz	23.2 oz	24 oz
ELEVATION TURRET MARKING GRADUATIONS		¼ MOA	¼ MOA	¼ MOA	¼ MOA	¼ MOA	¼ MOA
KNOB STYLE		Short - Push /Pull Locking	Short - Push /Pull Locking	Tall - Push / Pull Locking	Short - Push /Pull Locking	Tall - Push / Pull Locking	Tall - Push / Pull Locking
TOTAL ELEVATION ADJUSTMENT RANGE*		120 MOA	80 MOA	80 MOA	65 MOA	65 MOA	65 MOA
WINDAGE TURRET GRADUATIONS (Clicks)		¼ MOA	¼ MOA	¼ MOA	¼ MOA	¼ MOA	¼ MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		120 MOA	80 MOA	80 MOA	65 MOA	65 MOA	65 MOA
PARALLAX/FOCUS RANGE		Fixed @ 100 yd	25 yd to Infinity	25 yd to Infinity	25 yd to Infinity	25 yd to Infinity	25 yd to Infinity




Ballistic E3™



Ballistic E3™ Illuminated



Plex™



6.5 CM™ Illuminated

* NOTE: The illuminated reticle scopes are powered by a CR2032 lithium battery and have 6 brightness settings.

* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.

The **SIGNATURE HD** features a 5x zoom system with premium, fully multi-coated glass for crisp, bright images and new push/pull locking turrets. It's available with a wide choice of front and rear focal plane reticles. Most models include a side parallax adjustment and zero stop feature on all target knobs.





FULLFIELD IV™ RIFLESCOPES

In the realm of hunting, certain constants prevail: vigilant prey, unpredictable weather, and the unwavering reliability of your Fullfield IV scope. With an illustrious legacy spanning nearly five decades, marked by steadfast performance and meticulous enhancement, the newest iteration of the Fullfield stands as the ultimate ally for any hunter's pursuit.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

FULLFIELD IV RIFLESCOPE SERIES

FULLFIELD IV 2.5-10x42

MSRP \$228.00 | BALLISTIC E3™ | ITEM # 200485

MSRP \$276.00 | BALLISTIC E3™ Illu | ITEM # 200486

MSRP \$228.00 | PLEX™ | ITEM # 200487

FULLFIELD IV 3-12x42

MSRP \$336.00 | LONG RANGE MOA™ | ITEM # 200488

MSRP \$384.00 | C4 WIND MOA™ Illu. | ITEM # 200489

MSRP \$300.00 | BALLISTIC E3™ | ITEM # 200490

FULLFIELD IV 3-12x56

MSRP \$408.00 | BALLISTIC E3™ Illu | ITEM # 200491

FULLFIELD IV 4-16x50

MSRP \$468.00 | BALLISTIC E3™ Illu | ITEM # 200492

MSRP \$432.00 | 6.5 CM™ | ITEM # 200493

MSRP \$504.00 | LONG RANGE MOA™ Illu | ITEM # 200494

FULLFIELD IV 6-24x50

MSRP \$552.00 | BALLISTIC E3™ | ITEM # 200495

MSRP \$600.00 | FINE PLEX™ | ITEM # 200496


MSRP \$600.00 | SCR MOA™ | ITEM # 200497





SPECIFICATIONS

FULLFIELD IV RIFLESCOPES		2.5-10x40	3-12x42	3-12x56	4-16x50	6-24x50
ITEM NUMBER		200485/486/487	200488/489/490	200491	200492/493/494	200495/496/497
MAGNIFICATION		2.5-10x	3-15x	3-15x	4-16x	6-24x
OBJECTIVE LENS DIAMETER		42 mm	42 mm	56 mm	50 mm	50 mm
OBJECTIVE END DIAMETER		47.5 mm	49.28 mm	64 mm	57.4 mm	57.6 mm
OCULAR END DIAMETER		41.66 mm	41.66 mm	43.69 mm	42.16 mm	44.2 mm
TUBE DIAMETER		1 in.	1 in.	30 mm	1 in.	30 mm
FIELD OF VIEW (feet @ 100 yards)	Low High	46.0 ft 11 ft	38 ft 9 ft	40 ft 10 ft	26 ft 6.5 ft	20 ft 5.1 ft
EYE RELIEF	Low High	3.8 in. 3.5 in.	3.8 in. 3.5 in.	3.8 in. 3.5 in.	3.9 in. 3.5 in.	3.3 in. 3.5 in.
EXIT PUPILS	Low High	10.1 mm 4.6 mm	11 mm 4 mm	13.7 mm 5.4 mm	10.8 mm 3.4 mm	9.4 mm 2.7 mm
DIOPTRER SETTING		+2 to -3	+2 to -3	+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE		Rear	Rear	Rear	Rear	Rear
RETICLE		Ballistic E3 Ballistic E3 Illum. Plex	Long Range MOA C4 Wind MOA Illum. Ballistic E3	Ballistic E3 Illum.	Ballistic E3 illum. 6.5 CM Long Range Illum.	Ballistic E3 Illum. Fine Plex SCR MOA
LENGTH		11.6 in.	12 in.	14.38 in.	12.38 in.	15 in.
WEIGHT		16.8 - 18.4 oz	17.6 - 18.4 oz	24 oz	20.8 - 23.2 oz	24.8 - 25.6 oz
ELEVATION TURRET MARKING GRADUATIONS		¼ MOA	¼ MOA	¼ MOA	¼ MOA	¼ MOA
TOTAL ELEVATION ADJUSTMENT RANGE*		80 MOA	70 MOA	100 MOA	60 MOA	60 MOA
WINDAGE TURRET GRADUATIONS (Clicks)		¼ MOA	¼ MOA	¼ MOA	¼ MOA	¼ MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		80 MOA	70 MOA	100 MOA	60 MOA	60 MOA
PARALLAX/FOCUS RANGE		Fixed @ 100 yd	Fixed @ 100 yd	Fixed @ 100 yd	10 yd to Infinity	10 yd to Infinity

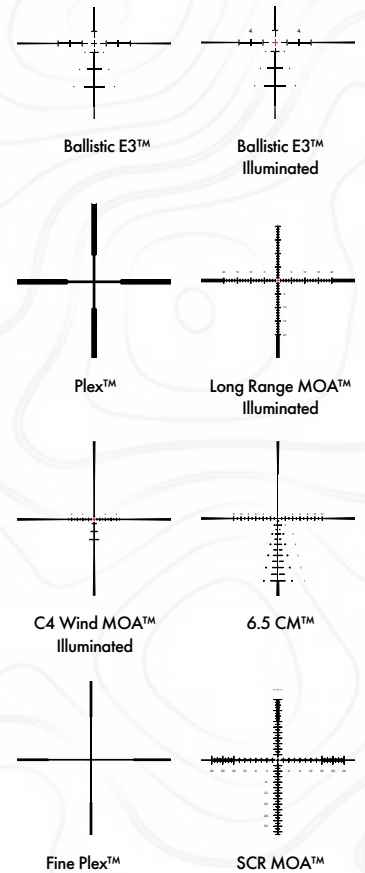

The **FULLFIELD IV SERIES** features an improved 4x zoom system with premium, multi-coated lenses for edge-to-edge clarity and low-light performance. Its sleek new design, with finger-adjustable turret knobs and adjustable parallax (select models) provides a wide selection of reticles for both hunting and long-distance target shooting.

* NOTE: The illuminated reticle scopes are powered by a CR2032 lithium battery and have 11 brightness settings.

* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.





FULLFIELD™ E1

RIFLESCOPES

If you had to pick just one scope that defines our DNA, it's the Fullfield. The original Fullfield and Fullfield E1 represent 50 years of performance, reliability, and countless filled tags. The Burris Fullfield E1™ continues that legacy. We've fine-tuned the reticles for added accuracy, and updated the power ring zoom to make it easier to turn and keep the lens covers from turning. But we haven't forgotten any of the features that made this scope line so popular.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

FULLFIELD E1 RIFLESCOPE SERIES



FULLFIELD E1 3-9x40 | ITEM # 200346

MSRP \$192.00 | BALLISTIC PLEX | SHOTGUN

FULLFIELD E1 3-9x40 | ITEM # 200347

MSRP \$192.00 | BALLISTIC PLEX | MUZZLELOADER

FULLFIELD E1 3-9x40 | ITEM # 20348

MSRP \$192.00 | BALLISTIC PLEX | .450 BUSHMASTER

FULLFIELD E1 3-9x40 | ITEM # 200366

MSRP \$192.00 | BALLISTIC PLEX | .350 LEGEND




SPECIFICATIONS

FULLFIELD E1 RIFLESCOPES		3-9x40	3-9x40	3-9x40	3-9x40
ITEM NUMBER		200346	200347	200348	200346
DESCRIPTION		SHOTGUN	MUZZLELOADER	.450 BUSHMASTER	.350 LEGEND
MAGNIFICATION		3-9x	3-9x	3-9x	3-9x
OBJECTIVE LENS DIAMETER		40 mm	40 mm	40 mm	40 mm
OBJECTIVE END DIAMETER		48 mm	48 mm	48 mm	48 mm
OCULAR END DIAMETER		39 mm	39 mm	39 mm	39 mm
TUBE DIAMETER		1 in.	1 in.	1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)	Low High	33 ft 13 ft	33 ft 13 ft	33 ft 13 ft	33 ft 13 ft
EYE RELIEF	Low High	3.4 in. 3.1 in.	3.4 in. 3.1 in.	3.4 in. 3.1 in.	3.4 in. 3.1 in.
EXIT PUPILS	Low High	13 mm 5 mm	13 mm 5 mm	13 mm 5 mm	13 mm 5 mm
DIOPTRER SETTING		+2 to -3	+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE		Rear	Rear	Rear	Rear
RETICLE		Ballistic Plex	Ballistic Plex	Ballistic Plex	Ballistic Plex
LENGTH		12.2 in.	12.2 in.	12.2 in.	12.2 in.
WEIGHT		13.0 oz	13.0 oz	13.0 oz	13.0 oz
ELEVATION TURRET MARKING GRADUATIONS		¼ MOA	¼ MOA	¼ MOA	¼ MOA
TOTAL ELEVATION ADJUSTMENT RANGE*		50 MOA	50 MOA	50 MOA	50 MOA
WINDAGE TURRET GRADUATIONS (Clicks)		¼ MOA	¼ MOA	¼ MOA	¼ MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		50 MOA	50 MOA	50 MOA	50 MOA
PARALLAX/FOCUS RANGE		Fixed @ 50 yd	Fixed @ 50 yd	Fixed @ 50 yd	Fixed @ 50 yd

* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.



Explore precise load details for your reticle on the BurrisConnect app or visit BurrisOptics.com/ballistic-tools.



Ballistic Plex™





DROPTINE™ RIFLESCOPES

Step into legendary Burris performance with a scope that steps up your game. Our reliable, high-quality glass is glare-resistant and excels in low light, featuring a shockproof design that gives you the most for your dollar. The Droptine is an easy-to-use, rugged hunting rifle scope designed to help you bring home big game for years to come.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

DROPTINE RIFLESCOPE

DROPTINE RIFLESCOPE 3-9x40

MSRP \$168.00 | BALLISTIC PLEX™ | ITEM # 200017

MSRP \$156.00 | BALLISTIC PLEX™ | ITEM #200019
(Calibrated for .22 LR ammo)

DROPTINE RIFLESCOPE 4.5-14x42

MSRP \$204.00 | BALLISTIC PLEX™ | ITEM #200019






SPECIFICATIONS

DROPTINE RIFLESCOPES		3-9x40	3-9x40	4.5-14x42
ITEM NUMBER		200017	200019	200077
MAGNIFICATION		3-9x	3-9x	4.5-14x
OBJECTIVE LENS DIAMETER		40 mm	40 mm	42 mm
OBJECTIVE END DIAMETER		48 mm	48 mm	51.5 mm
OCULAR END DIAMETER		39 mm	39 mm	39 mm
TUBE DIAMETER		1 in.	1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)		Low	33 ft	33 ft
		High	13 ft	13 ft
EYE RELIEF		Low	3.4 in.	3.4 in.
		High	3.1 in.	3.1 in.
EXIT PUPILS		Low	13 mm	13 mm
		High	5 mm	5 mm
DIOPTER SETTING		+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE		Rear	Rear	Rear
RETICLE		Ballistic Plex	Ballistic Plex	Ballistic Plex
LENGTH		12.2 in.	12.2 in.	12.6 in.
WEIGHT		13.0 oz	13.0 oz	15.3 oz
ELEVATION TURRET MARKING GRADUATIONS		¼ MOA	¼ MOA	¼ MOA
TOTAL ELEVATION ADJUSTMENT RANGE*		50 MOA	50 MOA	40 MOA
WINDAGE TURRET GRADUATIONS (Clicks)		¼ MOA	¼ MOA	¼ MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		50 MOA	50 MOA	40 MOA
PARALLAX/FOCUS RANGE		Fixed @ 100 yd	Fixed @ 50 yd	50 yd to Infinity

The **DROPTINE** features...

- Parallax adjustment for improved accuracy at long distances.
- Quality precision-ground lenses are larger than those of comparable scopes for better light collection.
- Index-matched, Hi-Lume® multicoating glass aids in low light performance and glare reduction, increasing your success rate.
- Durable, integrated eyepiece design has no-slip grip for easy adjustment in the field.
- Positive steel-on-steel adjustments ensure repeatable accuracy.
- Waterproof
- Nitrogen-filled scope tubes prevent internal fogging, even in cold and rain.
- Stress-free, 1-piece, solid outer tube is durable enough to withstand shock and vibrations of even the heaviest recoiling calibers.
- Features the Ballistic Plex™ reticle, the most simple, effective, and elegant trajectory-compensating reticle for hunting.



Ballistic Plex™






SCOUT™ SCOPE

Our slim, compact optics are specifically designed to match scout rifles, with low- to-medium magnification for close- to mid-range targets. When placed well forward on the rifle, you'll maintain perfect focus on moving and stationary targets. When that happens, we all know what goes down next.



Heavy Plex



Ballistic Plex™



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



SCOUT HANDGUN SCOPE



SCOUT RIFLESCOPE 2-7x32

MSRP \$540.00 | BALLISTIC PLEX™ | ITEM # 200261



SCOUT RIFLESCOPE 2.75x20

MSRP \$348.00 | HEAVY PLEX™ | ITEM # 200269

DROPTINE RIFLESCOPES		2-7x32	2.75x20
ITEM NUMBER		200261	200269
MAGNIFICATION		2-7x	2.75x
OBJECTIVE LENS DIAMETER		32 mm	20 mm
OBJECTIVE END DIAMETER		39 mm	27 mm
OCULAR END DIAMETER		38 mm	35 mm
TUBE DIAMETER		1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)	Low High	23 ft 8 ft	15 ft
EYE RELIEF	Low High	9.2 in. 12 in.	7.3 in.
EXIT PUPILS	Low High	16 mm 4.6 mm	7.3 mm
DIOPTRER SETTING		+2 to -3	+2 to -3
RETICLE PLANE		Rear	Rear
RETICLE		Ballistic Plex	Heavy Plex
LENGTH		9.7 in.	9.2 in.
WEIGHT		13.0 oz	7.0 oz
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE*		66 MOA.	140 MOA
ELEVATION/WINDAGE TURRET GRADUATIONS (Clicks)		¼ in.	½ in.
PARALLAX / FOCUS RANGE		Fixed @ 100 yd	Fixed @ 100 yd

* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.

HANDGUN SCOPE

Given handgun hunters use seriously impressive cartridges, we built these durable and reliable scopes with superb recoil absorption and long eye relief, perfect for heavy recoil long-range shooting.



WATERPROOF



SHOCKPROOF




FOGPROOF




NITROGEN-FILLED



POSI-LOCK™



Plex



Ballistic Plex™

HANDGUN SCOPES



ITEM # 200218



ITEM # 200229

HANDGUN SCOPE 2x20 |

MSRP \$312.00 | BALLISTIC PLEX™



ITEM # 200279

ITEM # 200291

ITEM # 200299



ITEM # 200298

HANDGUN SCOPE 2-7x32 |

MSRP \$468.00 | BALLISTIC PLEX™ / PLEX™



ITEM # 200309

HANDGUN SCOPE 3-12x32

MSRP \$100.00 | BALLISTIC PLEX™

HANDGUN SCOPES	2x20	2-7x32	2-7x32	3-12x32
ITEM NUMBER	200218/229	200279/291/298	200299	200309
MAGNIFICATION	2x	2-7x	2-7x	3-12x
OBJECTIVE LENS DIAMETER	20 mm	32 mm	32 mm	32 mm
OBJECTIVE END DIAMETER	27 mm	39 mm	39 mm	44 mm
OCULAR END DIAMETER	35 mm	38 mm	38 mm	38 mm
TUBE DIAMETER	1 in.	1 in.	1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)	Low High	21 ft 7 ft	21 ft 7 ft	14 ft 4 ft
EYE RELIEF	Low High	10 in. 24 in.	11-21 in. 10-14 in.	11-21 in. 10-14 in.
EYE RELIEF	Low High	10 in. 24 in.	11-21 in. 10-14 in.	10-19 in. 10-12.5 in.
EXIT PUPILS	Low High	10 mm 4.6 mm	16 mm 4.6 mm	11 mm 2.7 mm
DIOPTRIC SETTING	+2 to -3	+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE	Rear	Rear	Rear	Rear
RETICLE	Plex	Ballistic Plex/ Plex/Plex	Ballistic Plex/ Posi-Lock™	Ballistic Plex
LENGTH	8.9 in.	9.7 in.	9.7 in.	10.8 in.
WEIGHT	7.0 oz	13.0 oz	13.0 oz	16.0 oz
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE*	80 in.	64 in.	64 in.	28 in.
ELEVATION/WINDAGE TURRET GRADUATIONS (Clicks)	½ in.	¼ in.	¼ in.	⅛ in.
PARALLAX / FOCUS RANGE	Fixed @ 100 yd	Fixed @ 100 yd	Fixed @ 100 yd	25 yd to Infinity

* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.





OBSERVATION



SIGNATURE™ LRF 2000 RANGEFINDER

The perfect companion for your Burris riflescope, the Signature LRF 2000 redefines speed in a rangefinder. Quickly range targets from 5 to 2,400 yards using sport, hunting, or auto range modes, or scan the field with instant ranging using scan mode. With 7x magnification and HD glass, finding targets is easy.



SIGNATURE LRF 2000

MSRP \$360.00 | TEM # 300351



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



SPECIFICATIONS

ITEM NUMBER	300351
MAGNIFICATION	7x
FIELD OF VIEW @ 100 yd	31.5 mm
EYE RELIEF	16 mm
ANGLE RANGE	+70°
DIMENSIONS	4.75 in. x 3.25 in. x 1.5 in.
WEIGHT	6 oz
OPERATING TEMPERATURE	14 °F to 131 °F
POWER SOURCE	CR2 Lithium Battery xl
BATTERY LIFE	2,000 Ranges
LASER CERTIFICATION	Class 1





SIGNATURE™ LRF 10X42 BINOCULAR



Well-known for integrating powerful rangefinders into optics, Burris introduces the Signature 10x42 LRF Binocular for fast and precise ranging from 5 to 2,600 yards. Ultrasharp HD glass and easy-to-read display offer comfortable glassing and blazing-fast ranging for both hunters and shooters.

SIGNATURE LRF 10X42 BINOCULAR

MSRP \$1,200.00 | ITEM # 300299



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



SPECIFICATIONS

ITEM NUMBER	300299
MAGNIFICATION	10x
FIELD OF VIEW @ 100 yd	334 ft
EYE RELIEF	16 mm
ANGLE RANGE	+70°
DIMENSIONS	6.0 in. x 5.5 in. x 2.7 in.
WEIGHT	36 oz
OPERATING TEMPERATURE	5 °F to 131 °F
POWER SOURCE	CR2 Lithium Battery xl
BATTERY LIFE	2,000 Ranges
LASER CERTIFICATION	Class 1



As the premium binocular in the Burris lineup, the Signature HD Binoculars offer high-performance HD lenses and BaK-4 prisms that produce sharper images and edge-to-edge clarity. The multi-coated lenses create maximum light transmission and minimize glare when viewing in harsh conditions.



WATERPROOF

SHOCKPROOF

FOGPROOF

NITROGEN-FILLED

SPECIFICATIONS

ITEM NUMBER	300298	300297	300295	300293
MAGNIFICATION	8x	10x	12x	15x
OBJECTIVE DIAMETER	42 mm	42 mm	50 mm	56 mm
FOCUS SYSTEM	Fast Focus	Fast Focus	Fast Focus	Fast Focus
OPTICS SYSTEM	HD Roof Prism	HD Roof Prism	HD Roof Prism	HD Roof Prism
CLOSE FOCUS	8.2 ft	8.2 ft	13.1 ft	23.0 ft
FIELD OF VIEW @ 1,000 yd	330 yd	314 yd	251 yd	215 yd
EYE RELIEF	0.38 in.	0.61 in.	0.61 in.	0.69 in.
EXIT PUPIL	5.25 mm	4.2 mm	4.16 mm	3.7 mm
DIMENSIONS (IN.)	6 x 5.0 x 2.0	6 x 5.0 x 2.0	6.5 x 5.1 x 2.3	8.2 x 5.7 x 2.5
WEIGHT	25 oz	25 oz	28.5 oz	43 oz
IP DISTANCE RANGE	57 mm - 74 mm	57 mm - 74 mm	57 mm - 74 mm	60 - 75 mm
EYECUPS	Adjustable	Adjustable	Adjustable	Adjustable
WATERPROOF	1 m	1 m	1 m	1 m
OPERATING TEMP	-5 °F to 158 °F	-5 °F to 158 °F	-5 °F to 158 °F	-5 °F to 158 °F

SIGNATURE HD 8x42

MSRP \$600.00 | ITEM # 300298

SIGNATURE HD 10x42

MSRP \$660.00 | ITEM # 300297

SIGNATURE HD 12x50

MSRP \$720.00 | ITEM # 300295

SIGNATURE HD 15x56

MSRP \$960.00 | ITEM # 300296

- The open bridge design reduces weight and ensures comfortable handling, available in 8x, 10, and 12x models.
- Nitrogen filling provides waterproof and fogproof performance in harsh weather conditions.
- Robust aluminum eyecups for extreme ruggedness



Take command of low-light conditions with the Droptine HD Binocular(s), a seamless blend of unmatched clarity and uncompromising quality. Housed in a lightweight, compact design with an expansive field of view, the 8x or 10x magnification options enable your observation capabilities and extend your glassing sessions



DROPTINE HD 8x42

MSRP \$276.00 | ITEM # 300278

DROPTINE HD 10x42

MSRP \$300.00 | ITEM # 300279

- BaK-4 prisms and fully multi-coated lenses for maximum light transmission and reduced glare
- Nitrogen-filled for waterproof and fogproof performance in harsh weather conditions
- 8x magnification provides detail and a wide field of view
- 10x magnification is ideal for scouting eastern whitetail or western mule deer



DROPTINE™ HD
BINOCULARS



SPECIFICATIONS

ITEM NUMBER	300278	300279
MAGNIFICATION	8x	10x
OBJECTIVE DIAMETER	42 mm	42 mm
FOCUS SYSTEM	Fast Focus	Fast Focus
OPTICS SYSTEM	HD Roof Prism	HD Roof Prism
CLOSE FOCUS	7.5 ft	7.5 ft
FIELD OF VIEW @ 1,000 yd	393 yd	330 yd
EYE RELIEF	0.67 in.	0.59 in.
EXIT PUPIL	5.2 mm	4.17 mm
DIMENSIONS (IN.)	6 x 5.3 x 2.1	6 x 5.3 x 2.1
WEIGHT	26 oz	26 oz
IP DISTANCE RANGE	55 mm - 75 mm	55 mm - 75 mm
EYECUPS	Adjustable	Adjustable
WATERPROOF	1 m	1 m
OPERATING TEMP	5 °F to 131 °F	5 °F to 131 °F





SIGNATURE™ HD SPOTTING SCOPE

Elevate your glassing experience with Burris's Signature HD Spotting Scope. The 20-60x magnification range allows you to save time and boot leather to spot trophy animals from a distance. The HD lenses and apochromatic lens system eliminate color fringing to deliver superb edge-to-edge resolution.



SIGNATURE HD SPOTTING SCOPE

ITEM # 300103 | MSRP \$2,040.00



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



FOREVER WARRANTY
NO QUESTIONS ASKED

SPECIFICATIONS

SIGNATURE HD SPOTTING SCOPE	
ITEM NUMBER	300103
MAGNIFICATION	20 - 60x
OBJECTIVE DIAMETER	85 mm
FIELD OF VIEW @ 1000 yd	55 ft- 110 ft
EYE RELIEF	18 mm - 19.7 mm
EXIT PUPIL	4.25 mm - 1.4 mm
FOCUS	Fine Focus
LENGTH (ZERO DIOPTR)	16.25 in.
WEIGHT	70.4 oz
OPERATING TEMPERATURE	-5 °F to 150 °F
WATERPROOF	IPX7



ARCA RAIL



M-LOK ACCESSORY MOUNT INCLUDED







Burris

FIND WHAT MATTERS

ARCHERY



ORACLE 2™

BOW SIGHT

The Oracle 2 improves our original Oracle design with user-requested upgrades and enhancements. Eliminate guesswork with this improved rangefinding bow sight that provides a precise distance to the target at full draw. The Oracle 2 calculates and displays the exact aiming point for the distance and shot angle instantly, eliminating the need to aim between pins.



ORACLE 2 BOW SIGHT

MSRP \$720.00 | LED TRAJECTORY BAR | ITEM # 300401

- Improved accuracy, easier to set up and sight in
- Works for right- and left-handed shooters
- Fixed 20-yard pin for dead battery fail safe
- Program up to two different arrows
- Improved auto-bright detection for LED pins
- Improved manual brightness control
- Rugged, all-aluminum construction
- Enhanced water resistance

HOW IT WORKS

- 1 Sight in at 20 yards plus two farther distances and the Oracle 2 learns your arrow's entire trajectory curve.
- 2 Sight in up to two additional distances (optional) for extreme long-range accuracy.
- 3 The rangefinder measures the exact distance to your target while at full draw.
- 4 It instantly calculates the exact trajectory for the distance and shot angle.
- 5 The sight displays a bright LED pin at the exact aiming point for your shot.



WATERPROOF



SHOCKPROOF



FOGPROOF

SPECIFICATIONS

ITEM NUMBER	300401
WEIGHT	20 oz
BATTERY	CR 123
BATTERY LIFE	2,000+ Ranges
LASER TO REFLECTIVE TARGET	500 yd
LASER TO DEER	200 yd
OPERATING TEMP	-20 °F to 140 °F
STORAGE TEMP	-40 °F to 158 °F



ORACLE™ X

CROSSBOW SCOPE

The most innovative and technologically advanced crossbow scope available today, the Oracle X mounts seamlessly on your crossbow. Its built-in laser rangefinder gives you the exact aiming point. The automatic trajectory compensation eliminates holdover and compensates for distance and angle.



Oracle XB 124 Reticle



SPECIFICATIONS

ORACLE X RANGEFINDING CROSSBOW SCOPE

MSRP \$1,200.00 | LED TRAJECTORY BAR | ITEM # 300410

- Integrated inclinometer helps to determine shot placement for steep angle shots
- Program and save up to two bolt profiles to cover lightweight, fast bolts and heavy, high penetration bolts for different hunts
- Wireless remote
- Water-Resistant
- Digital level reduces unwanted cant
- Rugged, lightweight composite construction
- Precise aluminum mount/adjustment system
- Locking screws to ensure adjustments stay in place

ITEM NUMBER	300410
WEIGHT	20 oz
BATTERY	CR 123
BATTERY LIFE	2,000+ Ranges
LASER TO REFLECTIVE TARGET	500 yd
LASER TO DEER	200 yd
OPERATING TEMP	-22 °F to 149 °F
STORAGE TEMP	-40 °F to 158 °F







Burris

FIND WHAT MATTERS

THERMAL



The v3 Burris Thermal Scope (BTS) packs features that elevate night hunting to a new level. It offers digital zoom, hot track, stadiametric ranging, and 11 unique color palettes, making it a comprehensive tool for dominating nighttime hunts.



BTS35-400 v3

ITEM # 300603 | MSRP \$3,000.00

BTS35-640 v3

ITEM # 300605 | MSRP \$4,200.00

SPECIFICATIONS

BURRIS BTS35 v3	300603	300605
SENSOR RESOLUTION	400 x 300	640x480
SENSOR PIXEL PITCH	12 μm	12 μm
SPECTRAL RANGE	8 to 14 μm	8 to 14 μm
NETD	≤ 35 mk @ F1 77 °F	≤ 30 mk @ F1 77 °F
DETECTION DISTANCE	(Deer) 1,000 m 1,100 yd	(Deer) 1,000 m 1,100 yd
FOCAL LENGTH	35 mm F1.0	35 mm F1.0
FOCUSING	Manual Focus	Manual Focus
FIELD OF VIEW (DEG)	7.8° x 5.9°	12.5° x 9.4°
FRAME RATE	50 Hz	50 Hz
DIGITAL ZOOM	1x - 8x	1x - 8x
DISPLAY TYPE	OLED	OLED
DISPLAY RESOLUTION	1024 x 768	1024 x 768
BATTERY TYPE	1x 18650 (internal), 1x 18650 (removable)	1x 18650 (internal), 1x 18650 (removable)
BATTERY LIFE	≥ 6 hr @ 77 °F	≥ 6 hr @ 77 °F
OPERATING TEMPERATURE	- 4 °F to 122 °F	- 4 °F to 122 °F
WATERPROOF	IP67	IP67
DIMENSION (IN.)(LxWxH)	11.69 x 3.15 x 2.48	11.69 x 3.15 x 2.48



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



WIFI ENABLED

BTC35 v3

THERMAL CLIP-ON

Transform your hunting experience with the versatile Burris Clip-on v3. Whether you prefer a handheld tracker or want to convert your traditional riflescope into a thermal optic, the BTC v3 offers seamless adaptability. With its 1x, 2x, and 4x power zoom capabilities and a selection of five vivid color palettes, the Burris Clip-on allows you to identify thermal signatures up to 750 yards out. Demand more from your night hunting with the BTC v3.



BURRIS BTC35 v3

ITEM # 300623 | MSRP \$3,000.00

SPECIFICATIONS

BURRIS BTC35 v3	300623
SENSOR RESOLUTION	400 x 300
SENSOR PIXEL PITCH	12 μ m
SPECTRAL RANGE	8-14 μ m
NETD	\leq 35 mk @ F1 77 °F
DETECTION DISTANCE	(Deer) 1,000 m 1,100 yd
FOCAL LENGTH	35 mm F1.0
FOCUSING	Manual Focus
FIELD OF VIEW (DEG)	7.8 °x 5.9 °
FRAME RATE	50 Hz
DIGITAL ZOOM	1x, 2x, 4x
DISPLAY TYPE	OLED
RESOLUTION	1024 x 768
BATTERY TYPE	2x 16340 (RCR123) Rechargeable
BATTERY LIFE	\geq 2 hr @ 77 °F
OPERATING TEMPERATURE	- 4 °F to 122 °F
WATERPROOF	IP67
DIMENSIONS (IN.) (LxWxH)	15.98 x 2.95 x 2.52



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



WIFI ENABLED






BTH35 v3

THERMAL HANDHELD

With a modern, lightweight design, the Burris Thermal Handheld hot tracks targets over 750 yards away. New color palettes and outline mode allow for better target identification. Real time Wi-Fi-to-mobile allows you to control and record the handheld from your mobile phone.




BURRIS BTH35 v3

ITEM # 300636 | MAP \$2,160.00

SPECIFICATIONS

BURRIS BTH35 v3	300636
SENSOR RESOLUTION	400 x 300
SENSOR PIXEL PITCH	12 μ m
SPECTRAL RANGE	8-14 μ m
NETD	\leq 35 mk @ F1 77 °F
DETECTION DISTANCE	(Deer) 1,000 m 1,100 yd
FOCAL LENGTH	35 mm F1.0
FOCUSING	Manual Focus
FIELD OF VIEW (DEG)	7.8° x 5.9°
FRAME RATE	50 Hz
DIGITAL ZOOM	1x - 4x
DISPLAY TYPE	0.4-in. LCOS
RESOLUTION	1280 x 960
BATTERY TYPE	2X 18650 (internal)
BATTERY LIFE	\geq 5 hr @ 77 °F
OPERATING TEMPERATURE	- 4 °F to 122 °F
WATERPROOF	YES
DIMENSION (IN.) (LxWxH)	9.8 x 2.4 x 2.76

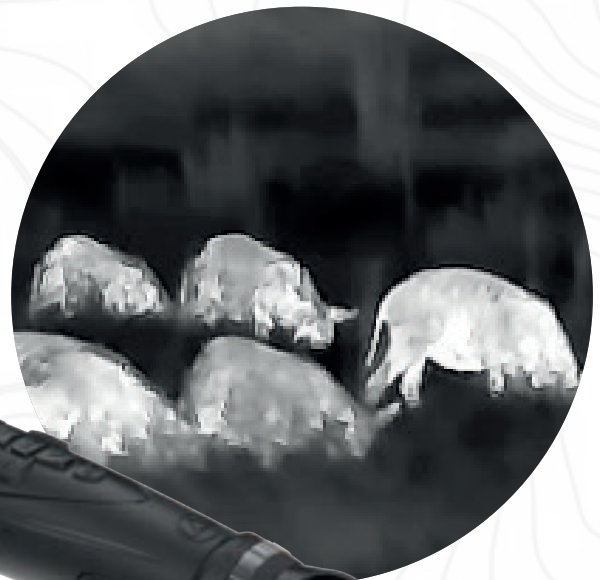

WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



WIFI ENABLED





TACTICAL







XTR PRO™ RIFLESCOPES

Our best competition riflescope ever, the XTR Pro once again raises the bar. Designed and manufactured in Greeley, Colorado, this next-generation long-range competition optic puts you on target at extreme ranges with innovation only Burris provides. Outpace the competition with exclusive features, including the Burris Race Dial and new tool-less Zero Click Stop Elevation Knob, and achieve better accuracy with three reticle options and best-in-class optical clarity.



WATERPROOF




SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



Proudly designed, machined,
and assembled in the USA.

XTR PRO RIFLESCOPE SERIES

XTR PRO RIFLESCOPE 5.5-30X56 - RED

MSRP \$2,640.00 | SCR2 MIL | ITEM # 202212

MSRP \$2,640.00 | SCR2 1/4 MIL | ITEM # 202213

MSRP \$3,000.00 | TREMOR™ 5 | ITEM # 202214

XTR PRO BLACK RIFLESCOPE 5.5-30X56 - BLACK

MSRP \$2,640.00 | SCR2 MIL | ITEM # 202222

MSRP \$2,640.00 | SCR2 1/4 MIL | ITEM # 202223

MSRP \$3,000.00 | TREMOR™ 5 | ITEM # 202224


SPECIFICATIONS

XTR PRO RIFLESCOPES		5.5-30x56	5.5-30x56
ITEM NUMBER		202212, 202213, 202214	202222, 202223, 202224
FINISH		RED	BLACK
MAGNIFICATION		5.5-30x	5.5-30x
OBJECTIVE LENS DIAMETER		56 mm	56 mm
OBJECTIVE END DIAMETER		63.5 mm	63.5 mm
OCULAR END DIAMETER		43.69 mm	43.69 mm
TUBE DIAMETER		1 in.	1 in.
FIELD OF VIEW	Low	23 ft	23 ft
(feet @ 100 yards)	High	4.2 ft	4.2 ft
EYE RELIEF	Low	3.2 in.	3.2 in.
	High	4 in.	4 in.
EXIT PUPILS	Low	8.6 mm	8.6 mm
	High	1.8 mm	1.8 mm
FOCAL PLANE		FFP	FFP
DIOPTER SETTING		+2 to -3	+2 to -3
LENGTH		15.16 in.	15.16 in.
WEIGHT		35.3 oz	35.3 oz
ELEVATION ADJUSTMENT		26 mil	26 mil
TOTAL CAPACITY			
WINDAGE ADJUSTMENT		15 mil	15 mil
TOTAL CAPACITY			
CLICK VALUE		1/10 mil	1/10 mil


* NOTE: The illuminated reticle scopes are powered by a CR2032 Battery.

XTR PRO SERIES FEATURES


- QUICK DETACH RACE DIAL**
 The Burris Race Dial elevation turret features a whiteboard-style coating. Shooters can use a dry/wet erase marker to mark and identify each target's click value on a given stage. Users can easily swap between two new Quick Detach turret caps, including the Burris QD Race Dial and standard black QD Dial, by squeezing two release buttons located on the sides of each cap.
- TOOLLESS ZERO CLICK STOP**
 Open the Cam Lever on the top of the Tool-less Zero Click Stop turret to quickly change zero.
- ADVANCED WINDAGE & ELEVATION ADJUSTMENT**
 Accurate and repeatable reticle adjustments match the measurement system of the reticle to make the windage and elevation adjustments fast and easy. The scope also comes with a cap for the windage knob.
- THROW LEVER**
 The optional Burris throw lever provides a simple mechanical advantage for faster and easier magnification changes.
- SWITCH ILLUMINATION COLORS**
 All reticles include red and green illumination settings with 11 levels of brightness each. Conveniently located off positions separate each brightness setting.



SCR2 1/4 MIL



SCR2 MIL

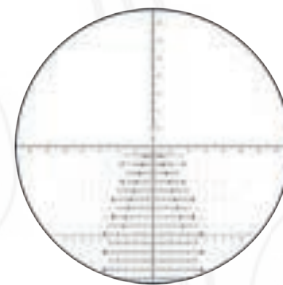

HORUS TREMOR 5



XTR III™ RIFLESCOPES

A Colorado original. Engineered and designed out West where distance is measured in hours instead of yards. This next-generation long-range competition puts you on target at extreme ranges with best-in-class features such as an industry-best field of view, 5x plus zoom range, a choice of three front focal plane reticles, race dial options, and more.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

XTR III RIFLESCOPE SERIES

XTR III RIFLESCOPE 5.5-30x56

MSRP \$1,740.00 | RETICLE SCR MOA | ITEM # 201213

MSRP \$1,740.00 | RETICLE SCR2 MIL | ITEM # 201214

XTR III RIFLESCOPE 3.3-18x50

MSRP \$1,500.00 | RETICLE SCR MOA | ITEM # 201203

MSRP \$1,500.00 | RETICLE SCR2 MIL | ITEM # 201204






SPECIFICATIONS


XTR III RIFLESCOPES		3.3-18x50	5.5-30x56
ITEM NUMBER		2001203/204	201213/214
MAGNIFICATION		3.3-18x	5.5-30x
OBJECTIVE LENS DIAMETER		50 mm	56 mm
OBJECTIVE END DIAMETER		58 mm	63.5 mm
OCULAR END DIAMETER		44.25 mm	44.25 mm
TUBE DIAMETER		34 mm	34 mm
FIELD OF VIEW (feet @ 100 yards)	Low	37.5 ft	23 ft
	High	6.8 ft	4.2 ft
EYE RELIEF	Low	3.25 in.	3.25 in.
	High	4.0 in.	4.0 in.
EXIT PUPILS	Low	8.6 mm	8.6 mm
	High	2.7 mm	1.8 mm
DIOPTRER SETTING		+2 to -3	+2 to -3
RETICLE PLANE		Front	Front
RETICLE		SCR MOA / SCR MIL	SCR MOA / SCR MIL
LENGTH		13.3 in.	15.16 in.
WEIGHT		31.4 oz	33.5 oz
ELEVATION TURRET MARKING GRADUATIONS		1/10 in. mil or 1/4 MOA	1/10 in. mil or 1/4 MOA
TOTAL ELEVATION ADJUSTMENT RANGE*		120 MOA / 35 MIL	90 MOA / 26 MIL
WINDAGE TURRET GRADUATIONS (Clicks)		1/10 in. mil or 1/4 MOA	1/10 in. mil or 1/4 MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		55 MOA / 16 MIL	51.6 MOA / 15 MIL
PARALLAX/FOCUS RANGE		25 yd to Infinity	25 yd to Infinity

* NOTE: All illuminated reticle scopes are powered by a CR2032 Battery.

* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.



SCR™ MOA



SCR2 MIL

SERIES FEATURES

- A 34-mm tube for extended adjustment range
- 5x zoom with 150° power ring rotation
- Improved optical system with a larger field of view, smaller eyepiece signature, and generous eye box at all magnifications
- Oversize tactical knobs with a Race Dial option or PRS and NRL style shooting
- Two reticle options in MIL or MOA
- Zero click stop for dependability



RT™ SERIES

Acquire close to mid-range targets quickly with the Burris RT line of Red Dot and Prism Sights designed specifically for tactical and competition shooters. Constructed of a one-piece aluminum body, each RT is compact, lightweight, and rugged. The RT-3 and RT-5 provide 3X and 5X magnification respectively with ballistic reticles, providing fine aiming lines for elevation, windage, and holdover compensation. This allows precise shot placement at tactical competition distances.



- WATERPROOF
- SHOCKPROOF
- FOGPROOF
- NITROGEN-FILLED

RT-SERIES



RT-3 PRISM SIGHT

MSRP \$468.00 | BALLISTIC 3X | ITEM # 300262



RT-5 PRISM SIGHT

MSRP \$564.00 | BALLISTIC 3X | ITEM # 300263



SPECIFICATIONS

RT-SERIES	RT-3	RT-5
ITEM NUMBER	300262	300263
MAGNIFICATION	3x	5x
OBJECTIVE LENS DIAMETER	20 mm	25 mm
OBJECTIVE END DIAMETER	33.8 mm	33.8 mm
OCULAR END DIAMETER	35 mm	35 mm
FIELD OF VIEW (feet @ 100 yards)	38.2	22.3
EYE RELIEF	2.6 in.	2.5 in.
MOUNT	Picatinny	Picatinny
RETICLE	Ballistic 3x	Ballistic 5x
LENGTH	3.54 in.	4.13 in.
WEIGHT	8.4 oz	9.5 oz
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE*	50 MOA	50 MOA
ELEVATION/WINDAGE TURRET GRADUATIONS (Clicks)	1 MOA	1 MOA
BATTERY	CR2032	CR2032
OPERATING TEMP	-20 °F to +140 °F	-20 °F to +140 °F

* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.



Ballistic 3X™



Ballistic 5X™

RT RED DOT SERIES FEATURES

- Lightweight for better balance
- Ballistic AR reticle for mid-to long-range targets
- Large field-of-view for greater situational awareness
- Automatic shut-off for extended battery life
- 7 Illumination settings: 4 daytime / 3 Night Vision



RT-6™ TACTICAL KIT RIFLESCOPES

These close quarter tactical kits are selected from the Burris tactical scope and sight families to provide you with an unfair advantage. They combine what you need from close-to-medium range scopes, with a FastFire Red Dot Sight for immediate close-in action, and a Burris quality mount to secure everything to a Picatinny rail-equipped firearm.

The 1-6x zoom starts at a true 1x, for both-eyes-wide-open target acquisition. The 6x top end gets you out past 600 yards. The Ballistic AR mil reticle combines a fast target-acquisition center with trajectory compensation for distance shots.



Available as a Tactical Combo Kit (200475)

RT-RIFLESCOPE

RT-6 1-6x24 TACTICAL KIT

MSRP \$720.00 | BALLISTIC AR™ | ITEM # 200475

Tactical kit includes scope, FastFire™ 3, and AR-PE.P.R.™ Mount




RT-6 1-6x24

MSRP \$444.00 | BALLISTIC AR™ | ITEM # 200472



SPECIFICATIONS

RT-6 RIFLESOPES		1-6x24	1-6x24 Tactical Kit
ITEM NUMBER		200472	200475
MAGNIFICATION		1-6x	1-6x
OBJECTIVE LENS DIAMETER		24 mm	24 mm
OBJECTIVE END DIAMETER		30 mm	30 mm
OCULAR END DIAMETER		46 mm	46 mm
TUBE DIAMETER		30 mm	30 mm
FIELD OF VIEW (feet @ 100 yards)	Low	106 ft	106 ft
	High	18.5 ft	18.5 ft
EYE RELIEF	Low	3.3 in.	3.3 in.
	High	4.0 in.	4.0 in.
EXIT PUPILS	Low	11.5 mm	11.5 mm
	High	5.2 mm	5.2 mm
DIOPTRER SETTING		+2 to -3	+2 to -3
RETICLE PLANE		Rear	Rear
RETICLE		Ballistic AR	Ballistic AR
LENGTH		10.3 in.	10.3 in.
WEIGHT		17.4 oz	25.4 oz
ELEVATION TURRET MARKING GRADUATIONS		½ MOA	½ MOA
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE*		80 MOA	80 MOA
PARALLAX/FOCUS RANGE		Fixed @ 100 yd	Fixed @ 100 yd



Ballistic AR™

SERIES FEATURES

- RT series offers precise performance designed for competition and tactical shooting
- Choice of 1x, 5x, and 6x zoom ranges for every needed distance, from close to long-range
- Ballistic AR™ and SCR 2 mil reticles with trajectory compensation out to 600 yards
- All scopes feature an integrated adjustable throw lever that you can position anywhere on the power ring for a customized fit



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED





RT™ RIFLESCOPES

Elevate your shooting style -- precision rifle competition, NRL .22 rimfire, 3-gun, or weekends at the range -- without exceeding your budget. Burris RT-25 and RT-15 Riflescopes offer the ideal solution. RT scopes feature an integrated and adjustable throw lever for quick and custom focus selection anywhere on the power ring.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

RT RIFLESCOPE



RT-25 RIFLESCOPE 2-25x56

MSRP \$876.00 | RETICLE SCR2 MIL™ | ITEM # 200481



RT-15 RIFLESCOPE 3-15x50


MSRP \$744.00 | RETICLE SCR2 MIL™ | ITEM # 200480



SPECIFICATIONS

RT RIFLESOPES		3-15-x50	5-25x56
ITEM NUMBER		200480	200481
MAGNIFICATION		3-15x	5-25x
OBJECTIVE LENS DIAMETER		50 mm	56 mm
OBJECTIVE END DIAMETER		58.93 mm	65.5 mm
OCULAR END DIAMETER		44.96 mm	44.96 mm
TUBE DIAMETER		30 mm	30 mm
FIELD OF VIEW (feet @ 100 yards)		Low High	Low High
		37.5 ft 7.5 ft	22.5 ft 4.5 ft
EYE RELIEF		Low High	Low High
		3.5 in. 3.8 in.	3.3 in. 3.3 in.
EXIT PUPILS		Low High	Low High
		8 mm 3.3 mm	8 mm 2.2 mm
DIOPTER SETTING		+2 to -3	+2 to -3
RETICLE PLANE		Front	Front
RETICLE		SCR2	SCR2
LENGTH		13.2 in.	14.3 in.
WEIGHT		23.2 oz	24.8 oz
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE*		80 MOA	65 MOA
ELEVATION/WINDAGE TURRET GRADUATIONS (Clicks)		0.1 mRad	0.1 mRad
PARALLAX/FOCUS RANGE		25 Yd to Infinity	25 Yd to Infinity

* Example: 50 MOA Total adjustment range equates to roughly 25 MOA in either direction from center.

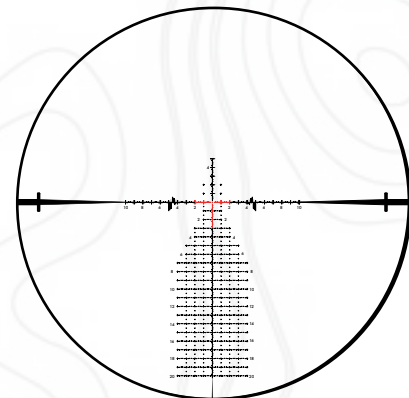

SCR 2

RT LONG RANGE SERIES FEATURES

- Designed for competition and tactical shooting
- All scopes feature an integrated adjustable throw lever can be located anywhere on the power ring for a customized fit
- Side parallax adjustment
- Zero click stop on adjustments



FASTFIRE™ C RED DOT REFLEX SIGHT

Burris Optics introduces the FastFire C, the latest innovation in our red dot optics, designed for everyday and concealed carry with sub-compact and micro-compact pistols. The FastFire C provides durability and reliability, with an always-on technology and a remarkable 25,000-hour runtime, powered by a CR2032 battery.

The low profile allows for absolute or 1/3 cowitness with standard open sights, eliminating the need for elevated sights. Designed with an intelligent auto-bright system and manual illumination settings, this compact red dot guarantees optimal visibility in any lighting condition.



WATER RESISTANT



SHOCKPROOF



FOGPROOF



FASTFIRE C RED DOT

FASTFIRE™ C

MSRP \$276.00 | 6 MOA DOT | ITEM # 300239



SPECIFICATIONS

FASTFIRE C	300239
MAGNIFICATION	1x
SIGHT WINDOW	22 mm x 17 mm (0.87 in. x 0.67 in.)
RETICLE	6 MOA
ELEVATION ADJUSTMENT RANGE	80 MOA
WINDAGE ADJUSTMENT RANGE	80 MOA
ADJUSTMENT GRADUATION (MOA per tick mark)	4 MOA
OPERATING TEMPERATURE RANGE	-4 °F to +140 °F (-20°C to +60°C)
POWER SUPPLY	One CR2032 Lithium Battery
DIMENSIONS: (LxWxH)	1.61 in. x 0.99 in. x 0.98 in. (40.8 mm x 25.1 mm x 24.9 mm)
WEIGHT	0.44 oz (12.5 g)
DEFAULT TO AUTOBRIGHTNESS	5 hr
BATTERY LIFE	25,000 hours on Medium
MOUNT PLATFORM	RMSC (Not Included)



FASTFIRE C FEATURES

- Compact & lightweight
- 1x magnification
- Bright red 6 MOA aiming dot
- Burris Intelligent Auto-Bright
- Windage & elevation adjustments
- Aspherical glass lens





FASTFIRE™ RED DOT REFLEX SIGHT

Get instant dot-on-target accuracy for any firearm, from handguns to shotguns, and for any sport, from 3-Gun to wing shooting. From patrol to plinking, the FastFire offers a wide range of reticle options, extended battery life, and four models, making it the most versatile red dot reflex sight you can mount.



FASTFIRE™ 4
MSRP \$456.00 | MULTI-RETICLE | ITEM # 300234



FASTFIRE™ 3
MSRP \$276.00 | 3 MOA DOT | ITEM # 300234
MSRP \$276.00 | 8 MOA DOT | ITEM # 300236



FASTFIRE™ RD
MSRP \$216.00 | RETICLE 2 MOA | ITEM # 300260





SPECIFICATIONS

FASTFIRE™ SERIES	FASTFIRE™ 3	FASTFIRE™ 3	FASTFIRE™ 4	FASTFIRE™ RD
ITEM NUMBER	300234	300236	300259	300260
SIGHT WINDOW	21 mm x 15 mm	21 mm x 15 mm		35.5 mm
EYE RELIEF	Unlimited	Unlimited	Infinite	Infinite
RETICLE	3 MOA	8 MOA	Multi-Reticle	2 MOA
ELEVATION ADJUSTMENT RANGE	115 MOA	115 MOA	90 MOA	90 MOA
WINDAGE ADJUSTMENT RANGE	86 MOA	86 MOA	90 MOA	90 MOA
ADJUSTMENT GRADUATION (MOA per tick mark)	1 MOA	1 MOA	1 MOA	1 MOA
POWER SUPPLY	CR1632	CR1632	CR1632	AAA
LENGTH	1.9 in.	1.9 in.	1.9 in.	2.8 in.
WEIGHT	1.5 oz	1.5 oz	1.6 oz	6.4 oz
MOUNT TYPE	Docter/Noblex	Docter/Noblex	Docter/Noblex	Picatinny
PARALLAX/FOCUS RANGE	Parallax-free	Parallax-free	Parallax-free	Parallax-free

* NOTE: The Fastfire 3 and Fastfire 4 sights come with a Picatinny mount.



OD GREEN
ITEM # 626058
MSRP \$36.00



FDE TAN
ITEM # 626059
MSRP \$36.00



BLUE
ITEM # 626059
MSRP \$36.00



RED
ITEM # 626056
MSRP \$36.00



FASTFIRE SERIES FEATURE

- Bright red dot allows for fast target acquisition and easy aiming
- Compact and lightweight, so it won't affect firearm balance or handling
- 1x magnification allows both-eyes-open shooting, for enhanced awareness and target acquisition
- Parallax-free for better accuracy
- Mounts to almost anything—including handguns, rifles, and shotguns—using Burris mounting systems
- Windage and elevation adjustments make fine-tuning easy
- Index-matched, Hi-Lume® multicoating provides low-light performance and glare elimination
- Nitrogen-filled and waterproof tubes prevent internal fogging in cold and rain
- Shockproof design stands up to years of punishing recoil
- Comes with our Burris Forever Warranty™





RINGS & MOUNTS



Ensure the longevity and durability of your FastFire sight with our premium selection of AR FastFire mounts and protector mounts. Crafted with meticulous precision, each mount features sturdy metal wings designed to safeguard your sight's lens from any unexpected impacts or mishandling. Versatile compatibility with both Weaver and Picatinny-style bases ensures seamless integration with a wide range of setups, guaranteeing peace of mind and optimal performance in any shooting scenario.

AR-F3™

MSRP \$119.00 | MOUNT ONLY | ITEM # 410348
COMPATIBLE WITH FASTFIRE 2 & 3 SIGHTS.
HEIGHT TO CENTER OF SIGHT 1.25" | DOCTER/NOBLEX FOOTPRINT



AR-F4™

MSRP \$124.00 | MOUNT ONLY | ITEM # 410347
COMPATIBLE WITH FASTFIRE 4 SIGHTS.
HEIGHT TO CENTER OF SIGHT 1.28" | DOCTER/NOBLEX FOOTPRINT



PICATINNY PROTECTOR MOUNT

MSRP \$100.00 | MOUNT ONLY | ITEM # 410330
COMPATIBLE WITH FASTFIRE 2 & 3 SIGHTS.
HEIGHT TO CENTER OF SIGHT 0.75" | DOCTER/NOBLEX FOOTPRINT





FASTFIRE™ MOUNTS

These mounts securely attach any generation FastFire Series Red Dot Sight to a specific firearm, with options for handguns, rifles, and shotguns.



FASTFIRE MOUNTS

ITEM NUMBER	MOUNT	PRICE
410321	1911 Standard	\$62.00
410322	1911 Adjustable/Novak	\$62.00
410323	Kimber® Standard/Target/Bomar	\$62.00
410324	Beretta® 92 & 96/90Two/Cougar/Taurus PT99	\$62.00
410319	Glock 45 ACP & 10mm, + PX4 Storm	\$62.00
410327	Sig Sauer® P226	\$62.00
410328	Springfield XD®	\$62.00
410336	Smith & Wesson® M&P®	\$62.00
410318	Ruger American Pistol	\$62.00
410329	Ruger® Mark I, II, III, IV.	\$62.00
410332	Ruger® M77, No. 1, Super Redhawk, Super Blackhawk Hunter	\$62.00
410333	Marlin® 336, 444, 1895 (Pre-drilled and tapped)	\$62.00
410334	Winchester® M94 (Pre-drilled and tapped)	\$62.00
410335	Picatinny/Weaver	\$48.00
410635	Sako® Rifles (Requires Picatinny Mount # 410335)	\$62.00

* Docter/Noblex Footprint




Hunters and tactical shooters count on Burris mounting solutions, offering a wide variety of options to securely mount a riflescope onto any Weaver or Picatinny-style rail. These rings and bases deliver long-lasting holding power and durability for hunters, duty officers, and competitive shooters.

AR-P.E.P.R.™ MOUNTS

- Full ring and base mounting solution in one
- Allows up to 2 inches of forward scope positioning
- Provides optimum eye relief and full field of view
- Includes both smooth and Picatinny ring tops
- Quick-detach models allow for fast mounting




**AR-P.E.P.R.
Quick-Detach
Model**

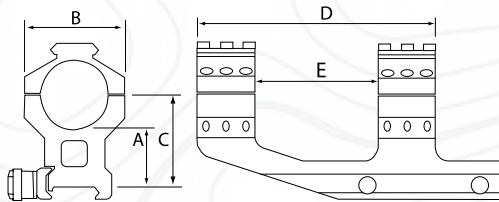

Item	Size	Weight	Dimensions					QD MOUNT	CANT
			A	B	C	D	E		
410341	30 mm	8.7 oz	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.		0 MOA
410342	30 mm	8.7 oz	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.	•	0 MOA
410343	1 in.	8.3 oz	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.		0 MOA
410344	1 in.	8.3 oz	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.	•	0 MOA
410345	34 mm	6.9 oz	0.68 in.	1.90 in.	1.35 in.	4.92 in.	2.90 in.		20 MOA

AR-SIGNATURE QD™ P.E.P.R.™ MOUNTS

- New streamlined design with QD mount insures ¼ MOA re-mount capability and allows for use of back up iron sights while maintaining proper eye-relief.
- Available in 30-, 34-, and 35-mm options with Burris' Signature polymer ring inserts, it provides adjustment from 5 to 40 MOA without using windage/ elevation knobs.

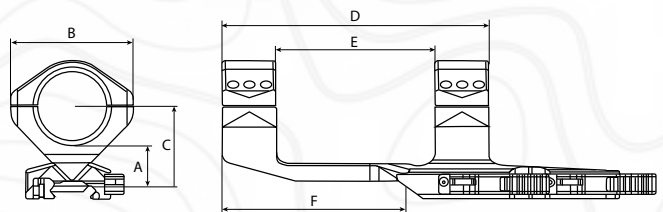

Item	Size	Weight	Dimensions						QD MOUNT
			A	B	C	D	E	F	
410352	30 mm	10.33 oz	.81 in.	2.13 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•
410353	34 mm	10.09 oz	.76 in.	2.28 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•
410354	35 mm	10.09 oz	.76 in.	2.28 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•



RINGS & MOUNTS

Xtreme Tactical Rings are built to withstand brutal use from competitors and tactical operators. They are lightweight, have plenty of holding power, and can endure any amount of recoil.

XTR RINGS™

- 1-in. and 30-mm models are lightweight aluminum with incredible holding power
- Quick-detach models allow fast mounting

Item	Size	Quick-Detach	Aluminum	Steel	1 Ring	2-Ring Set
Low						
420160	30 mm		•			•
420161	30 mm		•		•	
420180	1 in.		•			•
Medium						
420162	30 mm		•			•
420163	30 mm		•		•	
420181	1 in.		•			•
High						
420164	30 mm		•			•
420165	30 mm		•		•	
420182	1 in.		•			•
Extra-High						
420166	30 mm		•			•
420167	30 mm		•		•	
420183	1 in.		•			•



Low



Extra-High



Picatinny Ring Top


Picatinny Ring Top - allows attachment of accessories on top of mounted scope

420169	30 mm		•		•	
--------	-------	--	---	--	---	--

RING HEIGHTS

These are the dimensions of Xtreme Tactical Rings, from the center of the scope to the top of the mount base.

	Low	Medium	High	Extra-High
30 mm	0.85 in.	1.10 in.	1.35 in.	1.60 in.
1 in.	0.75 in.	1.00 in.	1.25 in.	1.50 in.



High



Low



Pos-Align® Offset Inserts


XTR SIGNATURE RINGS™

- Provide precision customization of cant maximizes usable elevation adjustment of the scope. Included inserts allow for 5, 10, 15, 20, 25, and 40 MOA of cant
- Provide 100% scope-to-ring contact, eliminating the need to lap rings while providing tremendous gripping power without leaving ring marks
- Strong, lightweight aluminum rings feature solid steel dual screw clamps that ensure each ring mounts flat and centered on any Picatinny base
- Includes the following Pos-Align® Offset Inserts: Concentric (Zero MOA), +/- 5 MOA, +/- 10 MOA, and +/- 20 MOA (2 sets)

RING HEIGHTS

These are the dimensions of XTR Signature Rings, from the center of the scope to the top of the mount base.

Item	Height	Size	Item	Height	Size
420210	1.00 in.	34 mm	420223	1.50 in.	30 mm
420211	1.50 in.	34 mm	420231	1.00 in.	1 in.
420221	1.00 in.	30 mm	420232	1.25 in.	1 in.
420222	1.25 in.	30 mm	420233	1.50 in.	1 in.



XTR Signature Ring Inserts Provided:

- One set of zero's
- One set of +5 and -5 (equal to +/- .005")
- One set for +10 and -10 (equal to +/- .010")
- Two sets of +20 and -20 (equal to +/- .020")

1/2-INCH PICATINNY RISER

- Provides 1/2 inch of additional mounting height for optimal sight alignment on tactical platforms



Item	Height	Length
410340	0.5 in.	1.5 in.



RINGS & MOUNTS

Burris Signature Rings set the industry standard for quality. Crafted from solid steel, these rings cater to various optics and bases, making them ideal for hunting. Pos-Align Inserts offer tremendous gripping power and durability without damaging the scope finish. The 1-in. or 30-mm sizes work with standard, dovetail, double-dovetail, and Weaver-style bases. Covered by the Burris Forever Warranty™

Signature Universal Dovetail Rings

Item	Size	Height	Finish
Signature Universal Dovetail			
420501	1 in.	Medium	Matte
420511	1 in.	High	Matte
420578*	30 mm	Medium	Matte
420581*	30 mm	High	Matte
420582*	30 mm	Extra-High	Matte



Signature Rimfire/Airgun Rings

Item	Size	Height	Finish
Signature Rimfire/Airgun			
420554	1 in.	Medium	Matte
420556	1 in.	High	Matte



Comes with clamps for 11 mm and 3/8-in. dovetails

SIGNATURE RINGS

- Revolutionary Pos-Align® Inserts technology
- Pos-Align Inserts guarantee perfect centering and maximum scope-to-ring contact for tremendous gripping power without damaging the scope finish
- Virtually sight in your gun without moving the scope adjustments
- Corrects misalignment caused by off-center receiver holes
- Corrects for slightly off-center bases or rings
- No need for expensive tapered bases or shimming for thousand-yard shooting
- Solid steel rings are ideal for hunting

Available for 1-in. rings (**ITEM 626019**), sold separately. Pos-Align Offset Insert Kits include one each of the following inserts: +5 and -5 (equal to +/- .005") +10 and -10 (equal to +/- .010") +20 and -20 (equal to +/- .020")

30-mm rings come with two sets of (0) and two sets of +10 and -10.

34-mm rings come with two sets of (0), one set of +10 and -10, and one set of +20 and -20.

Signature Zee Rings

Item	Size	Height	Finish
Signature Zee Rings (Weaver-Style)			
420520	1 in.	Medium	Black Gloss
420521	1 in.	Medium	Matte
420522	1 in.	Medium	Nickel
420530	1 in.	High	Black Gloss
420531	1 in.	High	Matte
420532	1 in.	High	Nickel
420585*	30 mm	Extra-High	Matte
420587*	30 mm	High	Matte
420588*	30 mm	Medium	Matte
420590	34 mm	High	Matte
420591	34mm	Medium	Matte



Pos-Align® Offset Inserts

Signature Pos-Align® Offset Inserts

Installation Kit

626019 1 each of +/- .005, +/- .010, +/- .020

Gunsmith Kit

626024 10 each of +/- .005, +/- .010, +/- .020

Individual Inserts

626017 +/- .010 Eccentric Offset


626018 +/- .020 Eccentric Offset



RING HEIGHTS

Ring Heights	Low	Medium	High	Extra-High
Signature 1 In.		0.77	0.89	
Signature 30 mm		0.78	0.89	1.02
Zee Signature 1 In.		0.77	0.92	
.22 Signature Deluxe		0.90	1.29	
Zee Signature 30 mm		0.81	0.93	1.18

Dimensions are from the centerline of the scope tube to the bottom of the ring.

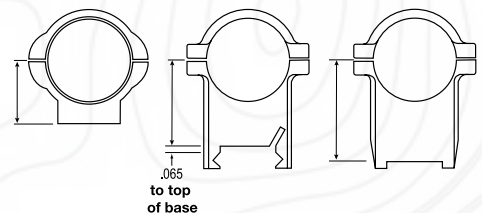

RINGS & MOUNTS



**Zee Ring,
Standard Model**



**Zee Ring,
Quick-Detach
Model**

ZEE RINGS

- Tough, solid steel
- Weaver-style
- Machined to exacting tolerances to handle recoil or abuse

Item	Size	Height	Finish	Quick-Detach
Weaver-Style				
420031	1 in.	Low	Matte	•
420034	1 in.	Medium	Matte	•
420044	30 mm	Medium	Matte	
420077	30 mm	High	Matte	
420079	1 in.	Low	Nickel	
420080	1 in.	Low	Black Gloss	
420081	1 in.	Medium	Black Gloss	
420082	1 in.	High	Black Gloss	
420083	1 in.	Low	Matte	
420084	1 in.	Medium	Matte	
420086	1 in.	High	Nickel	
420087	1 in.	High	Matte	



RIMFIRE/AIRGUN RINGS

- Available in solid steel or aluminum
- Securely mount your rimfire or airgun optic

Item	Size	Height	Finish	Material	Quick-Detach
.22 Ring Pairs (fits in 22-in. grooved receivers)					
420069	1 in.	Medium	Matte	Steel	
420072	1 in.	Medium	Black Gloss	Steel	
420073	1 in.	High	Black Gloss	Steel	
420076	1 in.	High	Matte	Steel	
420068	1 in.	Medium	Matte	Steel	•

CZ-STYLE RINGS

- Solid steel
- Designed for mounting optics on CZ rifles

Item	Size	Height	Finish	Action
CZ 550				
420130	1 in.	Medium	Matte	Long-Action
CZ 527				
420140	1 in.	Medium	Matte	Short-Action



TIKKA® T3® RINGS


- Solid steel
- Ring and base solution specifically designed for Tikka® T3® rifle

Item	Size	Height	Finish
Tikka T3 Rings			
420135	1 in.	Medium	Matte
420136	30 mm	Medium	Matte
420137	30 mm	High	Matte



RING HEIGHTS

Ring Heights	Low	Medium	High	Extra-High
Standard 30 mm		0.78	0.89	1.02
Zee 1 In. & Quick-Detach 1 In.	0.63	0.76	0.95	
Zee 30 mm		0.81	0.93	1.18
CZ (All)		1.00		
1-in. .22 Rings (All)		0.80	0.95	
Tikka T3		1.125	1.250	

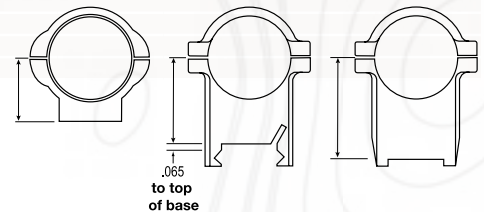

Dimensions are from the centerline of the scope tube to the bottom of the ring.



RINGS & MOUNTS



XTREME TACTICAL™ 1 PIECE BASES

The new Xtreme Tactical one-piece bases offer the perfect mounting solution for precision shooters. In addition to greater strength and rigidity, the 25 MOA cant offers extended range capability.

- Milled from a single piece of solid steel
- Compatible with all Weaver-style, Picatinny-style rings
- Designed to work with both short and long actions
- Matte finish


Item	Style	MOA Cant
410650	XTB-Sav Round Rear Long	25
410651	XTB-Sav Round Rear Short	25
410652	XTB-700 Long Action - Howa 1500 Long Action	25
410653	XTB-700 Short Action	25
410655	XTB-Howa 1500 Short Action	25
410658	XTB-TIKKA® (Tikka®)	25
410660	XTB-Sav Round Rear Long	No Cant
410661	XTB-Sav Round Rear Short	No Cant
410662	XTB-700 Long Action - Howa 1500 Long Action	No Cant
410663	XTB-700 Short Action	No Cant
410665	XTB-Howa 1500 Short Action	No Cant
410668	XTB-TIKKA® (Tikka®)	No Cant



XTREME TACTICAL™ 2-PIECE BASES

- Solid steel bases work with all Weaver-style, Picatinny-style, and mil-spec rings
- Engineered with minimal height and weight
- Mil-spec cross slots guarantee rock-solid attachment
- Matte finish

Item	Style	Reversible Front Base
410600	XTB-700/7 (Remington® 700 & 7 Short & Long)	•
410605	XTB-70/Express (Winchester® 70 Short, Long & Express)	•
410615	XTB-SavR (Savage® Short & Long Round Rear)	•
410620	XTB-SavF (Savage® Short & Long Flat Rear)	•
410625	XTB-ABOLT (Browning® A-Bolt Short & Long)	•
410630	XTB-TIKKA® (Tikka®)	•
410635	XTB-SAKO® Dovetail (SAKO® Dovetail Steel Base Low Profile)	

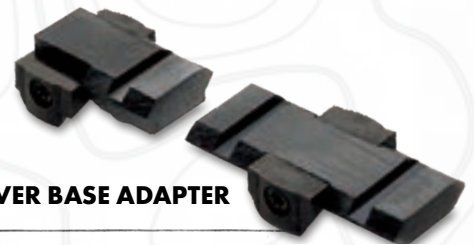

RUGER®-TO-WEAVER BASE ADAPTER

- For use with Zee Rings
- Mounts optics onto Ruger® firearms that feature the proprietary Ruger® integral mounting system

Item	Compatible with Ruger® Firearm
410990	M77®, Super Redhawk®
410991	No. 1, 77/22®, 77ML®, 77/44®, Mini-14®, Redhawk®
410992	M77® for use with Eliminator® LaserScope®







Burris

FIND WHAT MATTERS





★ ★ ★ ★ ★
FOREVER WARRANTY
★ NO QUESTIONS ASKED ★



BURRIS COMPANY
331 E. 8TH STREET
GREELEY, CO 80631
PHONE: 1-888-440-0244
WWW.BURRISOPTICS.COM

2024 BURRIS COMPANY. ALL RIGHTS RESERVED
BURRIS COMPANY IS OWNED BY BERETTA HOLDING S.P.A.